

CD and DVD Cardboard WALLET


TCAU Specification

TSA 005

Issue: 1

July 2010

Page 1 of 1

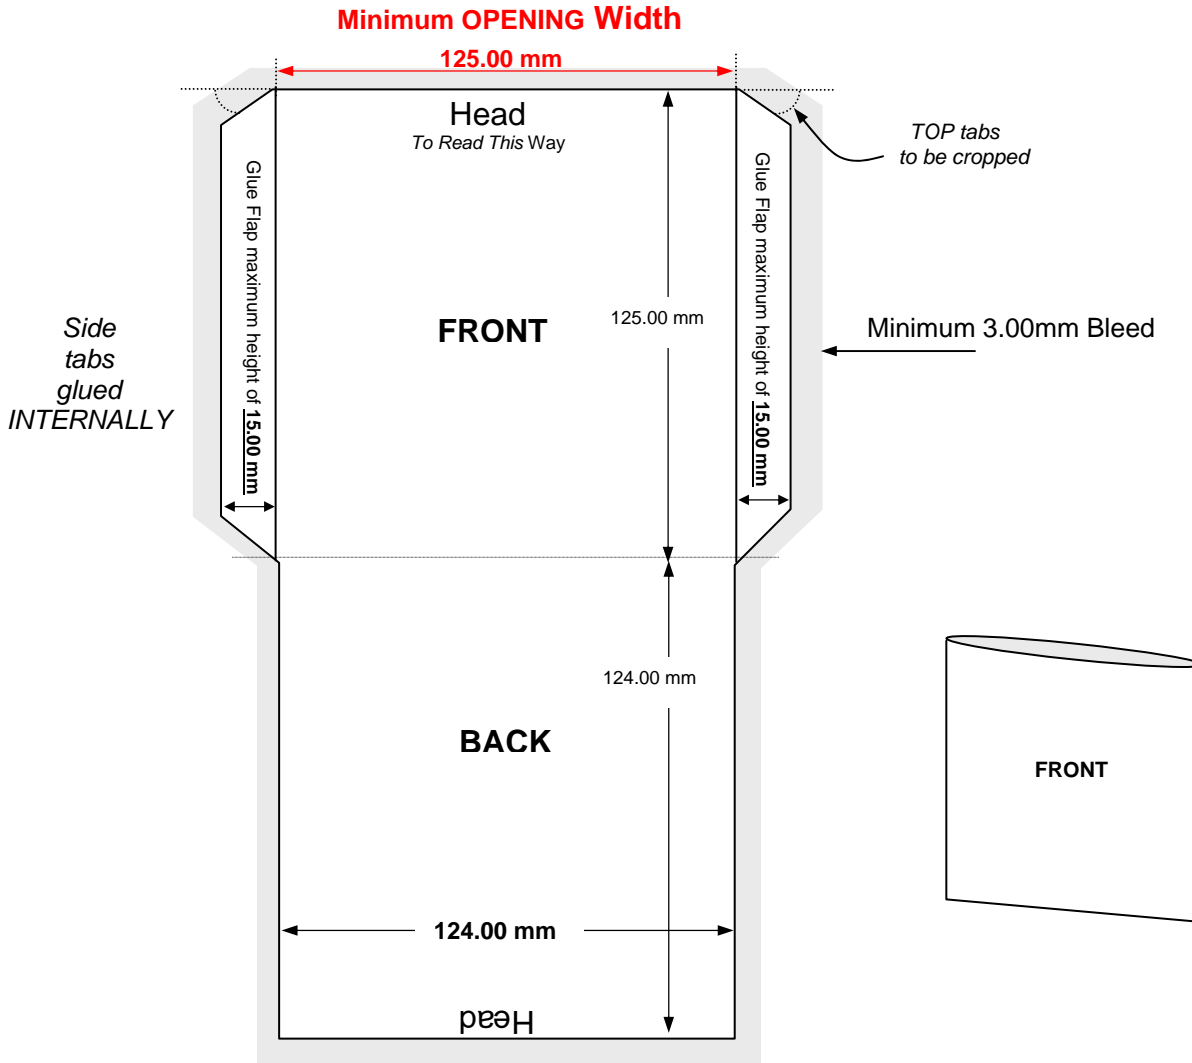

Specifications:

To be automatically packed, stock needs to be non-porous
 Stock coated cardboard specification is 220 gsm

Allow 3.00 mm bleed all round

Trim & perforation marks to show 1.00 mm into the bleed

All sides of wallet to be parallel to + / - 0.30 mm

All wallets must be received in flat condition with no signs of curvature

All edges to be cleanly cut

Internal seams must be cleanly glued or welded with no residue or 'strings', glued flat with no loose edges

Catalogue number must appear on the BACK of the final product

Note: Drawing Not To Scale