



<b>CD INLAY</b>				
TCAU Specification	TSA 145	Issue: 1	July 2010	Page 1 of 2

**Front & Back Up**  
**Shown as single spreads**  
**Files must be set up as separate pages for each spread**

Front

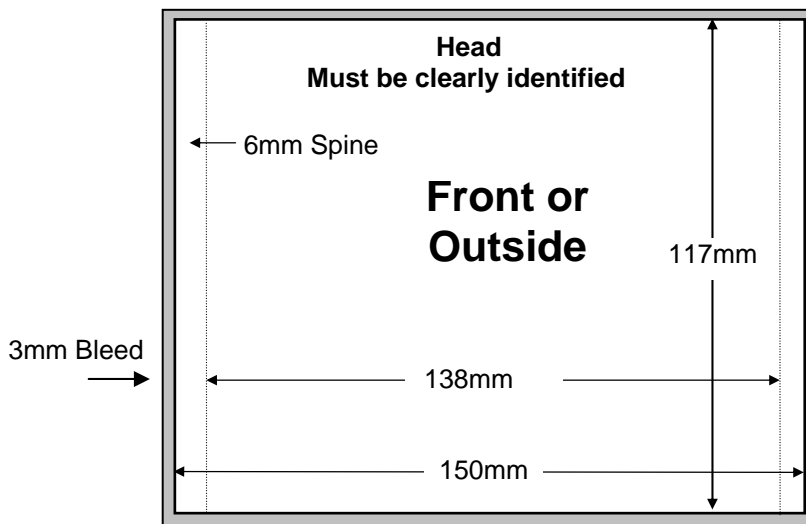

**Specifications:**

- To be automatically packed, stock needs to be non-porous.
- Allow 3mm bleed all round.
- Trim & perforation marks to show 1mm into the bleed.
- Stock Coated A2 Art 150-170 gsm.
- Catalogue number must appear on final product.
- To ensure correct direction, Head must be clearly identified.



**Note: Drawing Not To Scale**



<b>CD INLAY</b>				
TCAU Specification	TSA 145	Issue: 1	July 2010	Page 2 of 2

**Front & Back Up**  
**Shown as single spreads**  
**Files must be set up as separate pages for each spread**

Backup

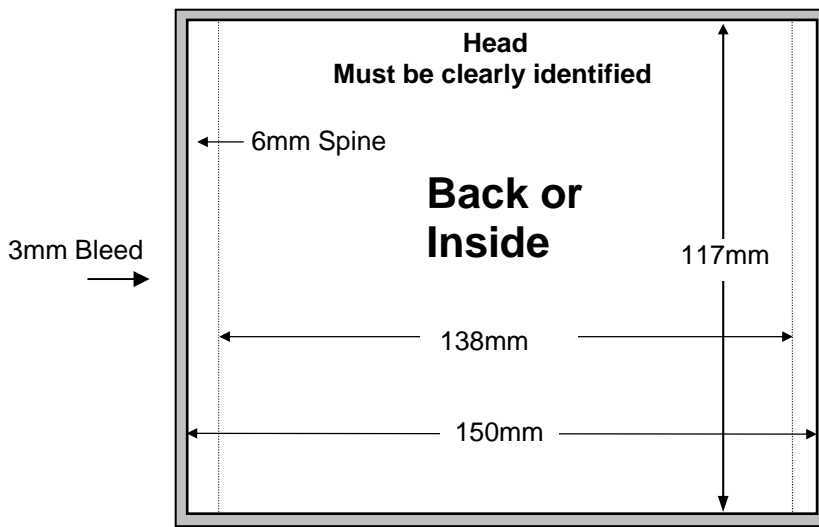

**Note: Drawing Not To Scale**

