



DVD – SLICK

TCAU Specification

TSA 234

Issue: 1

July 2010

Page 1 of 2

Printed material which does not conform to the relevant specification may require manual insertion at an additional charge or be considered unworkable

Material:

Paper Stock:

- Type: Wood free art paper coated on both sides
- High gloss finish is not acceptable for automated packing
- Weight: Stock A2 150 – 190 gsm (automated packing)
- Allow 3mm bleed all round
- Trim & perforation marks to show 1mm into the bleed
- Catalogue number must appear on the final product

Barcode Format:

It is the symbol producers' responsibility to ensure the barcodes will scan

- Border dimensions for barcodes acceptable to enable detection on automated inline barcode scanner



- Barcode Type: EAN 13 100%
- Orientation: Lines Vertical
- Barcode Height: 16.00 mm minimum
- Barcode Width: 25.00 mm minimum
- The UPC Barcode is printed within a white box measuring a minimum of :
33.00 mm by 22.00 mm
- The left and right had side of the white box must not be infringed by test or other artwork
- The "Quite Zone" (clear space border) must be greater than: 4.00 mm
- Medium Density: (0.33mm) required
- Wide/Narrow Ratio: 3:1
- Print Contrast (PCS) : 0.90 + / - 0.07 (LAMBDA = 633nm)

Note: Drawings Not To Scale



DVD – SLICK

TCAU Specification	TSA 234	Issue: 1	July 2010
			Page 2 of 2


Slick Dimensions:

As per diagram below

Note: Drawings are not to scale

Barcode Placement:

- Visible on the outside back page of slick, and printed at least 3 mm away from any seams
- 99% detection accuracy can be provided by the automated inline barcode scanner if the barcode is placed in the **“preferred”** location as indicated below

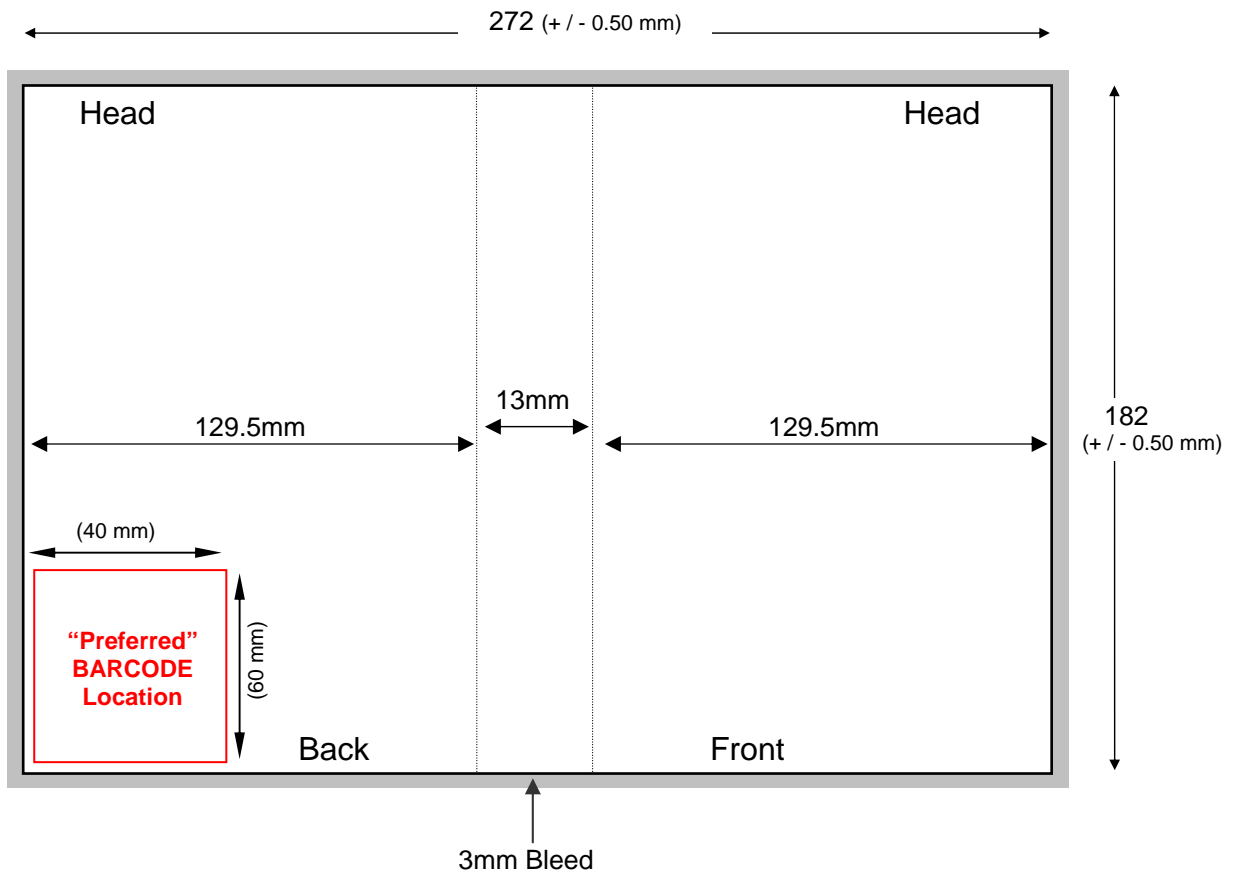

Note: Drawings Not To Scale

